

PLBC SERIES

PLBC 12FT 12V 200Ah



EnSmart PLBC series is designed specially for power supply cabinets for telecommunication systems and mainly used in outdoor base stations which require high cycle levels.

EnSmart PLBC battery uses LeadCarbon technology and excellent heat dissipation performance and the floating standby performance, specially designed for gas gathering and exhaust system. The PLBC Series performs greatly under high and Low ambient temperature and ensures the security of the system.

Benefits

- + High energy density
- + Low internal resistance and self-discharge rate
- + Excellent fast charging acceptance: 1.5 hour to 90% SOC
- + Excellent high rate discharge performance in low temperature
- + Super high PSoc cycle life


Standards

- + Compliance with IEC 60896 standards
- + Manufactured in OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities

Application

- + Telecommunications Power system
- + Backup Power
- + Grid-Connected Energy Storage System
- + Off-Grid Energy Storage System
- + Demand Charge Reduction
- + Time-of-Use Bill Management

Layout

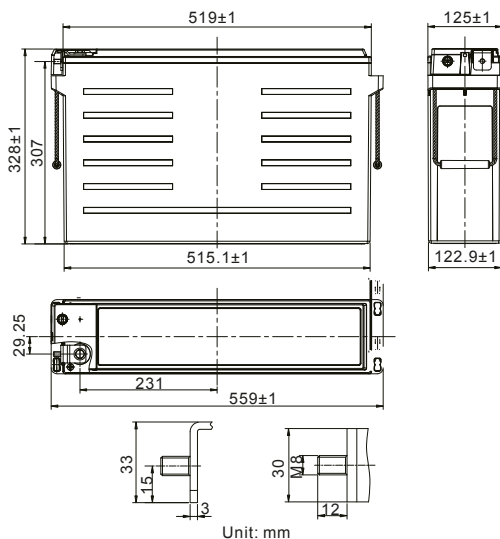

Specifications

Rated Voltage	12V	
Nominal Capacity	$C_{10}, 1.80V/cell$	200Ah
	$C_8, 1.75V/cell$	200Ah
Dimension	Length	559±1mm (22.01 inches)
	Width	125±1mm (4.92 inches)
	Container Height	328±1mm (12.91 inches)
	Total Height	328±1mm (12.91 inches)
Approx. Weight	60.5 Kg (133.4 lbs)	
Terminal	M8	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (25°C)	210.0 Ah	(10hr, 21.0A, 1.80V/cell)
	210.0 Ah	(8hr, 26.3A, 1.75V/cell)
	196.5 Ah	(5hr, 39.3A, 1.75V/cell)
	173.7 Ah	(3hr, 57.9A, 1.75V/cell)
	144.3 Ah	(1hr, 144.3A, 1.67V/cell)
Max. Discharge Current	2520A	
Internal Resistance (25°C)	Approx. 2.6mΩ(Fully charged)	
Operating Temp. Range	Discharge	-40~65°C (-40~149°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~40°C (-4~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max. Charging Current(25°C)	63.0A	
Charge voltage(25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	PLBC series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter. Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.	


Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	352.8	294.0	264.6	205.8	157.8	128.8	76.6	55.0	45.4	37.5	25.0	20.4	10.7
1.80V/cell	390.6	319.2	283.5	218.2	166.5	135.4	79.5	56.9	47.0	38.7	25.8	21.0	10.8
1.75V/cell	415.8	336.0	296.1	227.9	172.2	139.7	81.2	57.9	47.9	39.3	26.3	21.3	10.8
1.70V/cell	441.0	352.8	308.7	236.1	177.1	142.9	82.4	58.7	48.3	39.8	26.5	21.6	10.9
1.67V/cell	466.2	369.6	321.3	240.2	179.4	144.3	83.1	59.0	48.6	40.0	26.7	21.8	11.0
1.60V/cell	491.4	378.0	327.6	245.8	182.2	146.4	83.6	59.3	48.9	40.2	26.8	21.8	11.1


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	627.4	501.9	453.7	357.1	278.8	238.4	131.7	96.2	81.6	68.6	49.7	41.0	21.5
1.80V/cell	693.8	545.2	488.2	372.6	286.3	239.5	134.2	96.4	82.6	69.0	50.1	41.3	21.7
1.75V/cell	719.3	570.9	509.8	385.3	293.6	240.6	136.6	96.5	83.6	69.1	50.5	41.6	21.8
1.70V/cell	748.7	595.7	528.2	396.3	300.5	245.5	138.9	96.6	84.5	69.2	50.8	41.9	21.9
1.67V/cell	790.7	623.0	537.3	401.4	303.5	247.6	141.8	97.2	84.9	69.5	50.9	42.3	22.0
1.60V/cell	799.7	627.2	541.0	407.5	306.3	249.3	142.1	98.0	85.1	69.8	51.0	42.7	22.1


Discharge Characteristics

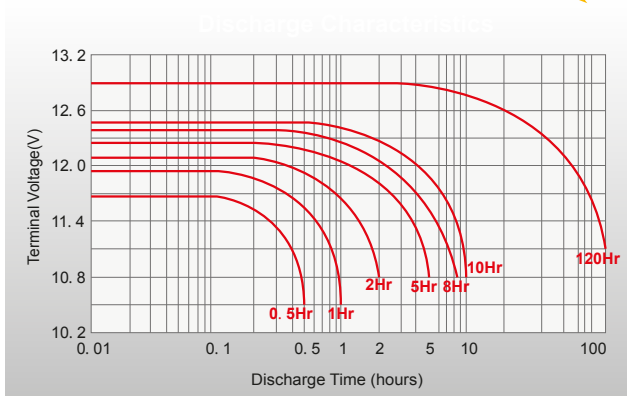


Temperature in Relation to Capacity

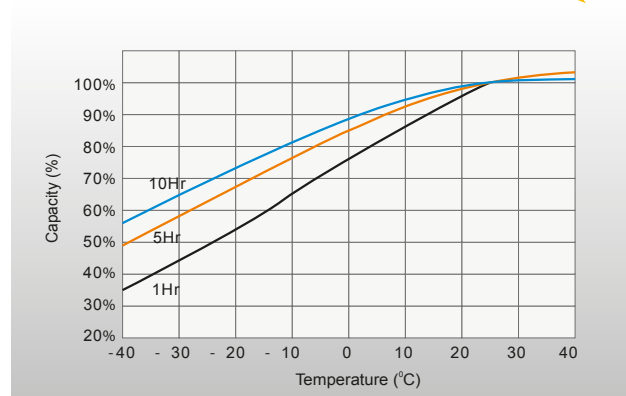

Cycle Life vs. Depth of Discharge

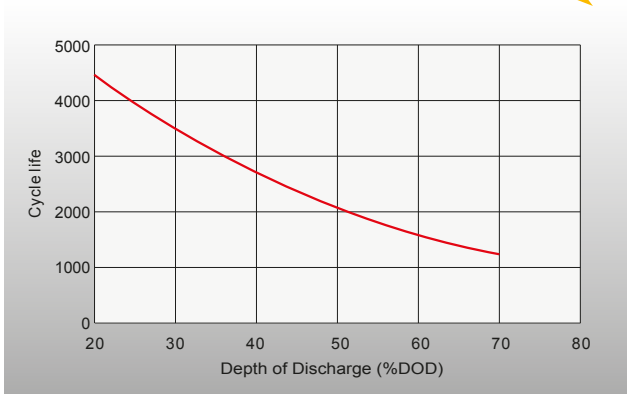

Self-discharge Characteristics

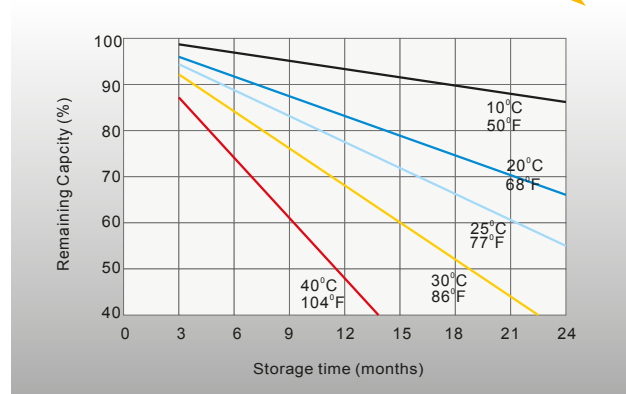

United Kingdom

Ensmart Power Ltd.
Kemp House 160 City Road,
London, UK EC1V 2NX, GB
☎ +44 20 3808 85 60
✉ sales@ensmartpower.com

Turkey

Ensmart Güç Kaynakları ve Enerji Depolama
Sistemleri San. ve Tic. A.Ş.
Halk Cad. Palladium Office, No:8/A3, Atasehir,
Istanbul, Turkey 34752, TR
☎ +90 216 225 84 66
✉ sales@ensmartpower.com

China

Ensmart Power (Shenzhen) Co.,Ltd.
218E24#, Bldg.3, Zone 30, No.2,
Kefa Rd., Hi-tech. Park,
Yuehai St., Nanshan, Shenzhen, China
☎ +86 13420986759
✉ amy.zhang@ensmartpower.com